


13 January 2009

**BID PACKAGE A - SITE PREPARATION  
THE GIVING TREE CHILDCARE CENTER, INC.  
CLARKSVILLE, TN**

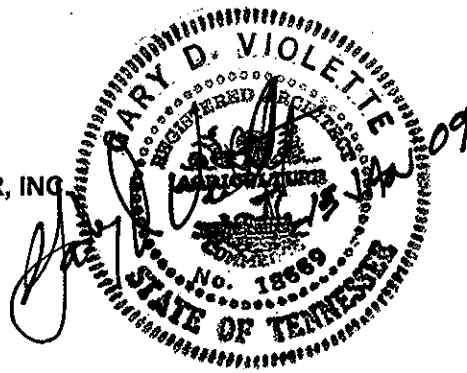

**ADDENDUM NO. THREE**

TO PLANHOLDERS: This addendum is issued to modify the original drawings, and is hereby made part of the contract documents. Please attach this addendum to the drawings in your possession. Review changes to each portion of the work, as changes of one portion may affect the work of another.

**ITEM 01.**

SHEET C001, DEMOLITION, CLEARING & GRUBBING, GENERAL NOTES; Add the following: "CONTRACTOR'S OPTION: IN LIEU OF OFF-SITE DISPOSAL, STUMPS FROM REMOVAL OF TREES MAY BE BURIED IN AN ON-SITE PIT SOUTH TO BE LOCATED NEAR THE SOUTHERNMOST PROPERTY LINE AT THE CONTRACTOR'S OPTION. RETURN PIT & RELATED DISTURBED AREAS TO PRE-CONSTRUCTION CONDITIONS." CLARIFICATION: Erosion controls, topsoil replacement and seeding and sowing requirements shall apply. Burning or open fires shall not be permitted on-site.

**ITEM 02.**

SHEET C001, DEMOLITION, CLEARING & GRUBBING, GENERAL NOTES; Add the following: "SCARIFY AND REMOVE CRUSHED STONE PARKING AREA ALONG R.O.W. NEAR WEST PROPERTY LINE IN ITS ENTIRETY." CLARIFICATION: No crushed stone is to remain in unpaved areas along right-of-way.

**ITEM 03.**

SHEET C101, DRAINAGE AND EROSION CONTROL, SITE/UTILITY LAYOUT; Delete reference to "E-ONE 2000 SERIES - GP2016". SUBSTITUTE THEREFOR, "E-ONE 2000 SERIES - GP2016-104".

**ITEM 04.**

SHEET C101, DRAINAGE AND EROSION CONTROL; Add the DETENTION BASIN CROSS SECTION attached hereto. CLARIFICATION: Cut earth berm to form weir as shown.

**END OF ADDENDUM NO. THREE**

